


# ***GATE OPERATOR***

**Model RSG-2000**

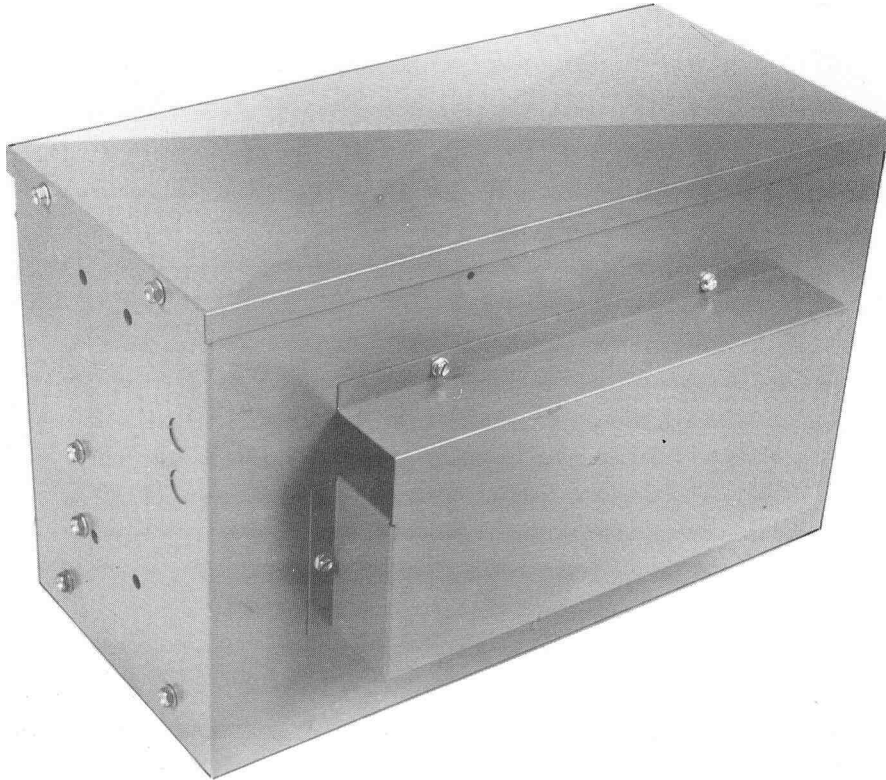

## **Residential Slide Gate Operator**

### **ELECTRICAL SPECIFICATIONS**

- 115V, 10
- 1/2 HP Instant Reversing Motor w/Thermal Overload Protection (Max. Cycles per Hour 10)
- On/Off Power Switch
- Low Voltage Control Circuit
- 24V for Accessories
- Solid State Motor Controller
- Built-in Obstruction Sensing Device with separate adjustments for open and close
- Built in Entrapment Alarm
- Pre-Wired to accept Radio Control, Loop Detector, Photocell, 1 Button Station and Keyswitch
- Can be wired as Master/Slave (two operators required)
- Auto Close Timer
- Maximum Run Timer (Auto-set)
- 1.5 second delay on reverse

### **MECHANICAL SPECIFICATIONS**

- For Use on Residential Slide Gates (up to 14' Wide, Max. Weight 350 lbs.)
- Can be Post or Pad Mounted
- Positive Chain Driven Rotary Limit Switches
- Manual Disconnect Provided
- Universal Left or Right Hand Mounting
- Steel All Weather Enclosure
  
- UL 325 Class I & II Listed