


PRODUCT OVERVIEW

STANDARD FEATURES

- Two line Large LC Directory.
 - Names listed in Directory in alphabetical order.
 - Memory capacity: 25, 50, 150, 250, 500, 1000 names.
 - User-friendly programmability via built-in alpha-numeric keyboard eliminates the need for user's manual.
 - Four character alpha-numeric password required to enter programming mode.
 - Programmable Utility keycodes for keyless entry.
 - 60 Utility keycodes available per system.
 - Time zones associated with Utility keycodes.
 - Programmable real-time clock with leap year & daylight savings compensation.
 - 2 programmable 7-day timers for door and gate control.
 - Programmable talk time.
 - Touch-tones through microphone are ignored by system.
 - System mutes tones in speaker during dialing.
 - Postal lock capability.
 - Surge protection;
 - Power line: 5,000 volts surge protection.
 - Tel line: 800V (100A) surge protection.
 - Immune to 25,000V electrostatic discharge.
 - Two output relays with independent strike times.
 - Relay output for VCR time lapse recorder to record 5 seconds per transaction.
- Power failure backups:
 - Battery backup for complete function for 5 hrs.
 - Battery enables dial out, program, & display.
 - Non-Volatile removable SRAM memory has unlimited write cycles (unlike EEPROM).
 - Non-Volatile Real Time Clock/Calendar.
 - High quality voice communication system with background noise filtering.
 - Voice messages (digital) to help & guide user.
 - Volume control via software.
 - Non-Volatile PCMC 1A memory card
 - Two (2) slots for PCMCIA memory cards. Second slot used for file backup.
 - Double box with built-in full keyboard for data processing.
 - Parallel printer interface common to all computer printers.
 - Print reports of programmable information.
 - Printer error/Paper empty detection.
 - By pressing '9' for gate or '5' for door, communication is not lost. Talk time is extended to avoid unpleasant cutoff between visitor and resident.
 - Both DTMF tone and rotary dial detection.
 - Programmable via modem-2400 bps (optional).
 - FCC part 68 ,15 & Canadian DOC approval

SPECIFICATIONS

- Construction: Front Panel: 16 gauge stainless steel.
Processor Containment Box: Gold/zinc plated, powder coated 16 gauge metal (weather resistant finish)
- Entire system is rain resistant.
- Power Input: 12 VAC, 40VA UL listed transformer(provided).
- Jack Type: USOC RJ11C or W
- Operating Environment:
 - Temperature: -40 F to +185 F.
(Heater kit available at additional cost.)
 - Relative Humidity: 5% - 95% non-condensing.
- Dimensions: 11 1/4" W X 16 7/16" H X 3 3/16" D
- Shipping Weight: Approximately 25 lbs.

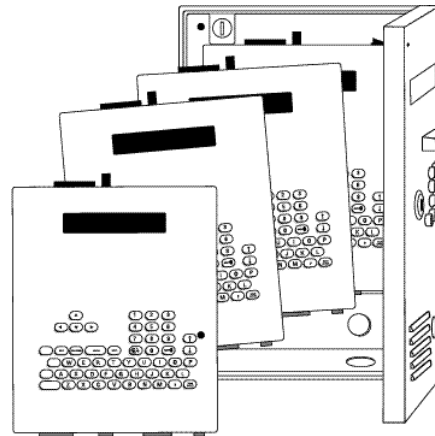


3 YEAR WARRANTY
FACTORY TO DEALER

RESIDENT USE

USING KEYCODES AND UTILITY CODES (ACTIVE ENTRY 1 ONLY)

RESIDENT 6-DIGIT KEYCODES

Residents are assigned a 6-digit, personalized key-code for accessing the facility. To use the keycode assigned, the resident must first push the  key once and enter their keycode. The screen will display "Access Granted" (fig a.) and access will be allowed. If an incorrect keycode is entered, the system will inform the user of the invalid entry (fig b.) The resident can then re-enter their keycode.



* ACCESS GRANTED *
Please Enter

(fig a.)




* INVALID ENTRY *
Invalid 6-Digit Code

(fig b.)

EXAMPLE - KEYCODE 002543 =  (0) (0) (2) (5) (4) (3)

INDIVIDUAL UTILITY CODES

All systems, no matter what the memory capacity, are equipped with 60 different Utility codes. To access the facility within the time zone set, the Utility Company must first press the  key TWICE and then enter their 4-digit code. If it is within the programmed time zone for entry, the screen will display "Access Granted" (fig c.) and access will be allowed. If, however, it is not within the time zone for entry, the display will inform the user and access will not be allowed (fig d.)





* ACCESS GRANTED *
Please Enter

(fig c.)



* ACCESS DENIED *
Not In Access Period

(fig d.)

EXAMPLE - UTILITY CODE 8716 =   (8) (7) (1) (6)

SCREEN SAVER MODE


If the Dial Code System is inactive for 15 seconds it will go into sleep mode. The screen will continue to display the scrolling message "Press Any Key" until a key is pressed. The Screen saver mode is not available while in program mode.



PRESS ANY KEY


(fig e.)

ENTRY PHONE FEATURES

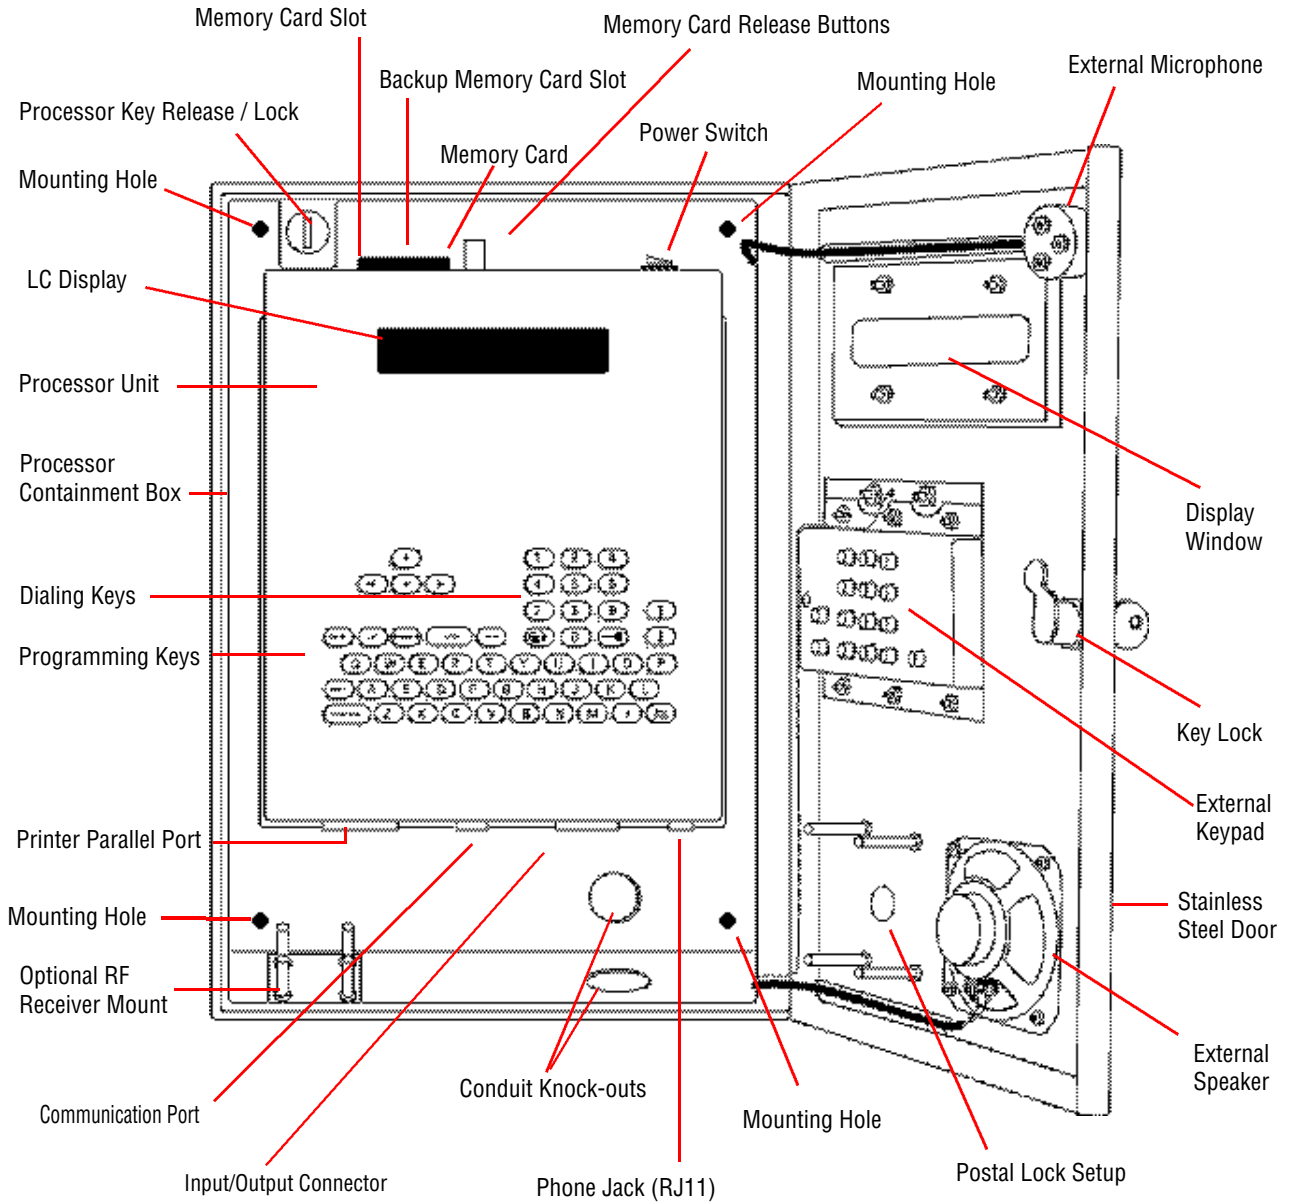

All components and specifications are subject to change without notice.


ENTRY PHONE FEATURES

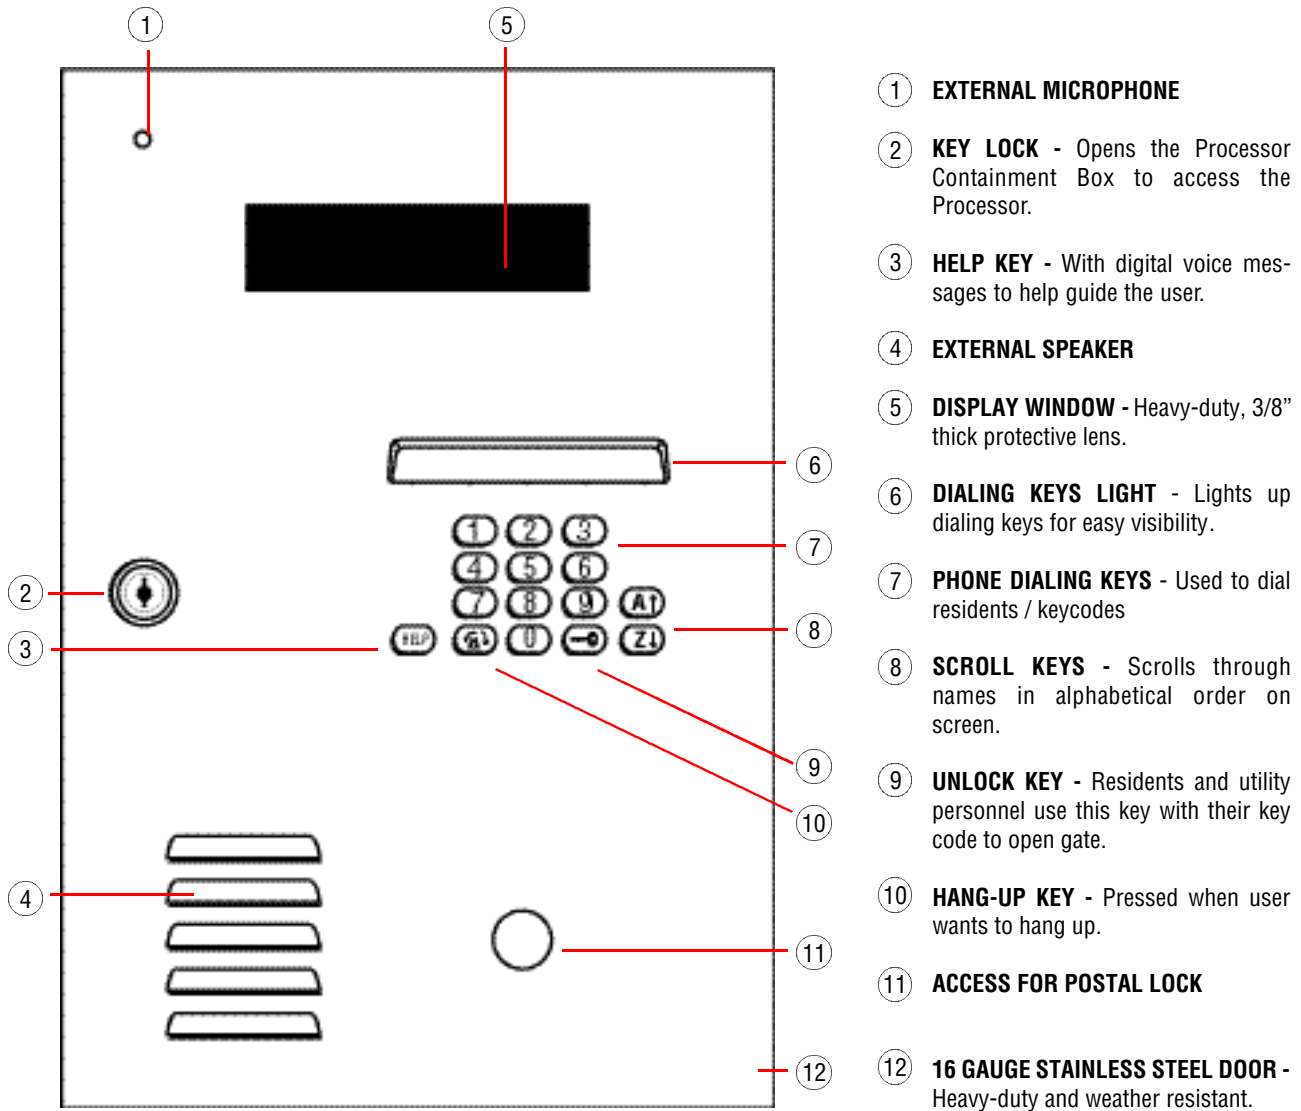

- ① **EXTERNAL MICROPHONE**
- ② **KEY LOCK** - Opens the Processor Containment Box to access the Processor.
- ③ **HELP KEY** - With digital voice messages to help guide the user.
- ④ **EXTERNAL SPEAKER**
- ⑤ **DISPLAY WINDOW** - Heavy-duty, 3/8" thick protective lens.
- ⑥ **DIALING KEYS LIGHT** - Lights up dialing keys for easy visibility.
- ⑦ **PHONE DIALING KEYS** - Used to dial residents / keycodes
- ⑧ **SCROLL KEYS** - Scrolls through names in alphabetical order on screen.
- ⑨ **UNLOCK KEY** - Residents and utility personnel use this key with their key code to open gate.
- ⑩ **HANG-UP KEY** - Pressed when user wants to hang up.
- ⑪ **ACCESS FOR POSTAL LOCK**
- ⑫ **16 GAUGE STAINLESS STEEL DOOR** - Heavy-duty and weather resistant.

All components and specifications are subject to change without notice.


ENTRY PHONE FEATURES

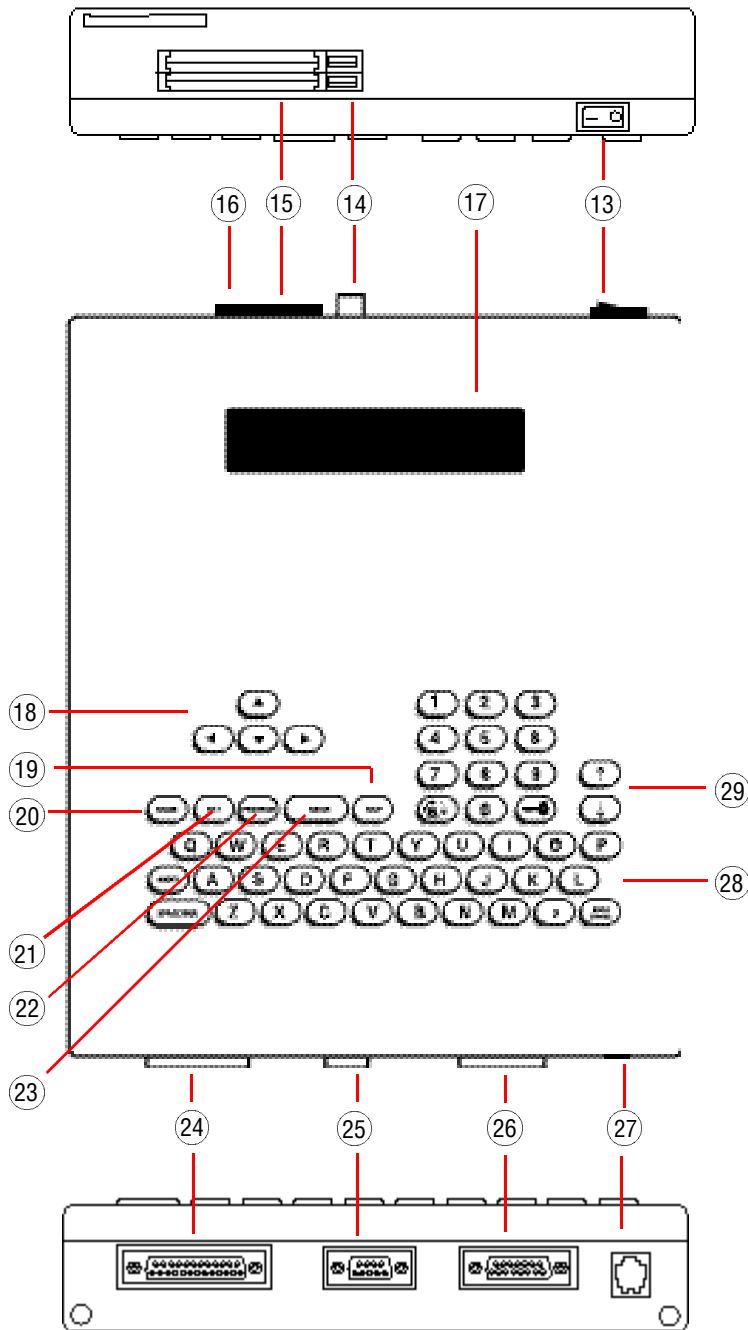

- ⑬ **POWER ON/OFF SWITCH**
- ⑭ **MEMORY CARD RELEASE BUTTONS** - Eject Memory Cards when pressed.
- ⑮ **CARD SLOTS** - Front slot holds Backup Memory Card or RF Card, back slot holds Main Memory Card.
- ⑯ **MEMORY CARD** - Stores all programmed information.
- ⑰ **TWO LINE, LARGE LIQUID CRYSTAL DISPLAY** - Displays information and instructions, two lines at a time.
- ⑱ **DIRECTION KEYS** - Move cursor to desired position within screens.
- ⑲ **HELP KEY** - Helps user while in programming or user modes.
- ⑳ **ERASE KEY** - Erases information screens no longer needed.
- ㉑ **EXIT KEY** - Press this key to go back to previous screen / menu.
- ㉒ **PROGRAM KEY** - Sets Processor to program mode.
- ㉓ **ENTER KEY** - Registers information into memory after it is typed.
- ㉔ **PRINTER PARALLEL PORT** - Enables printing of programmed information.
- ㉕ **COMMUNICATION PORT** - RF Interface for future remote control and card access use.
- ㉖ **INPUT/OUTPUT CONNECTOR** - Main power, input/output connection.
- ㉗ **PHONE JACK (RJ11)** - Connects to main phone line.
- ㉘ **KEYBOARD** - Works like standard keyboard to type in information and names.
- ㉙ **SCROLL KEYS** - Scrolls through screens / menus.




All components and specifications are subject to change without notice.

MOUNTING INSTALLATION

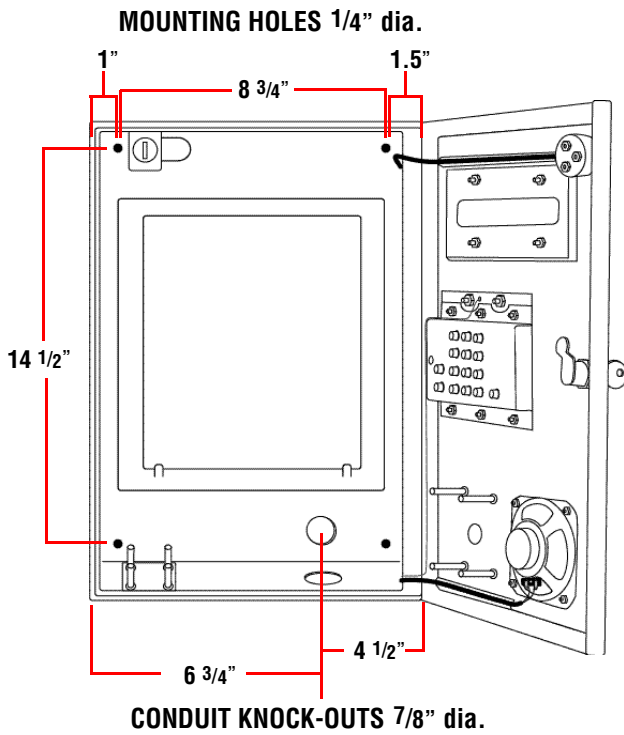


FOR INSTALLATION ON WALL

Remove the Processor Unit from the Processor Containment Box and bolt the Processor Containment Box to recess in wall using the four mounting holes. Feed the power and phone lines through the appropriate holes for connecting to the Processor Unit.

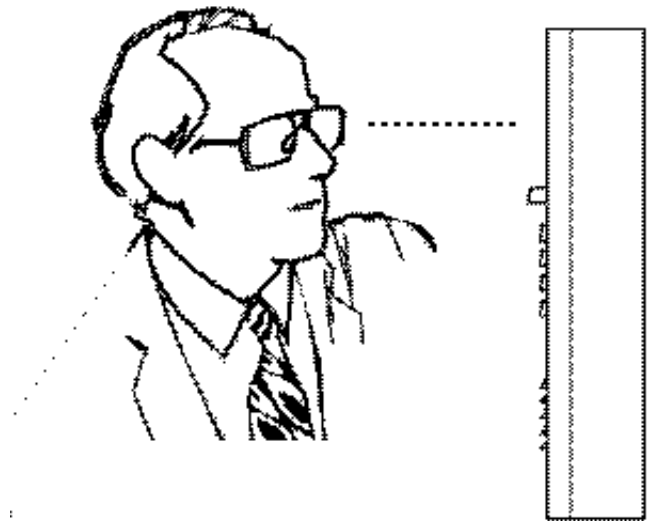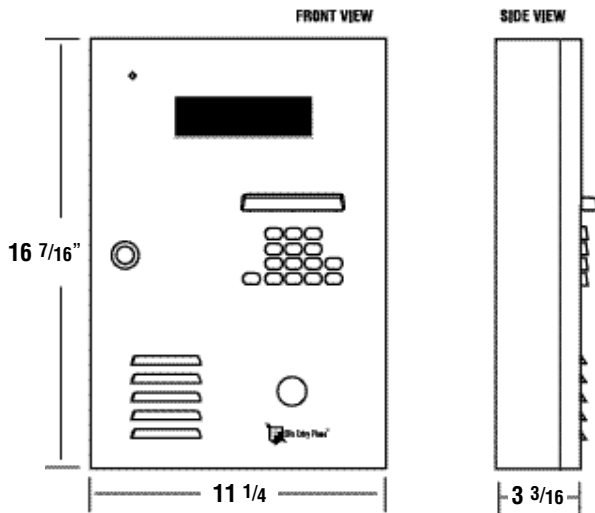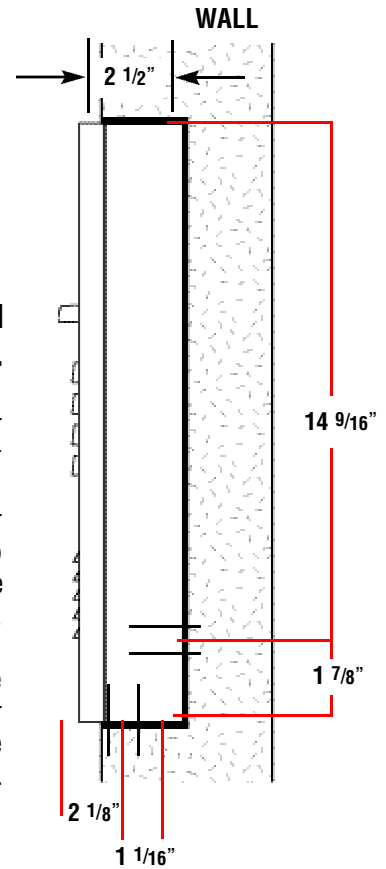

NOTE: Be sure to install the Entry Phone at normal eye level

WIRING DIAGRAM

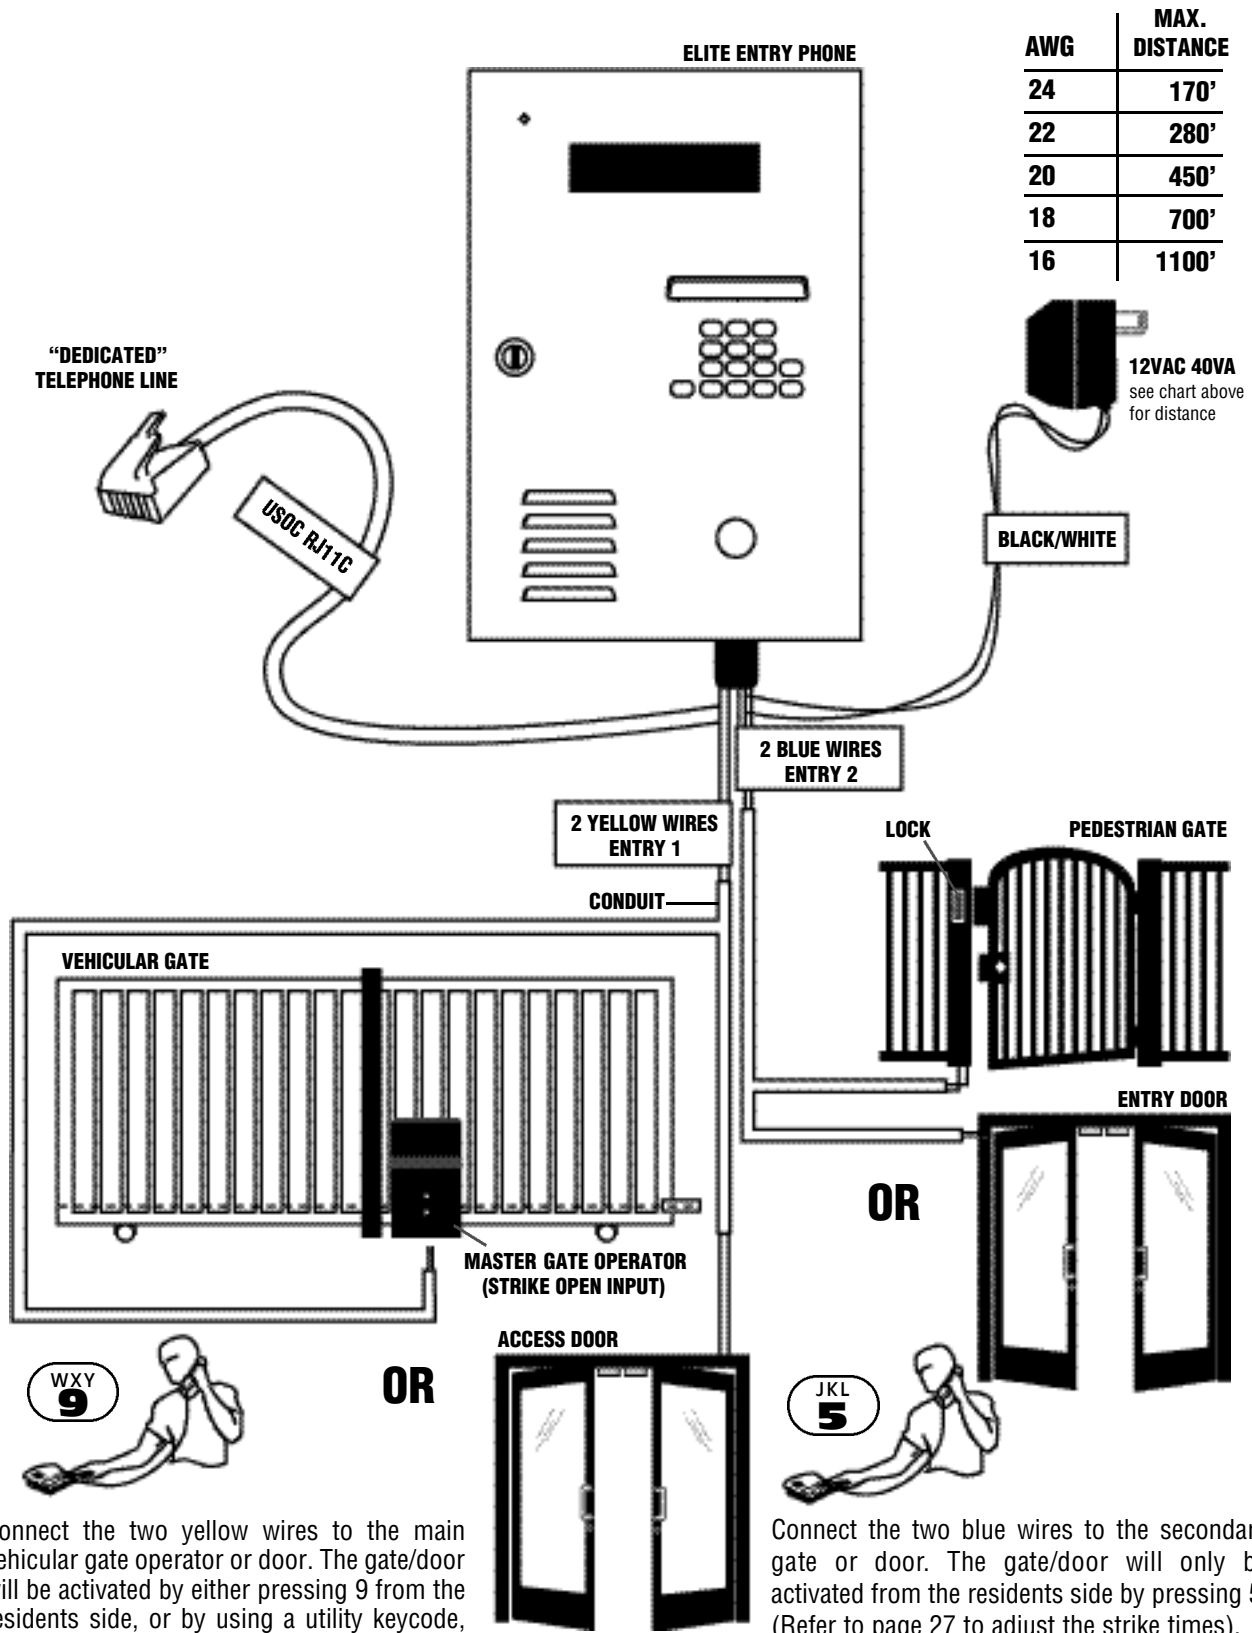



Connect the two yellow wires to the main vehicular gate operator or door. The gate/door will be activated by either pressing 9 from the residents side, or by using a utility keycode, individual keycode or optional RF transmitter from Entry Phone side. (Refer to page 12 & 13)

Connect the two blue wires to the secondary gate or door. The gate/door will only be activated from the residents side by pressing 5. (Refer to page 27 to adjust the strike times).

POSTAL LOCK INSTALLATION

These parts are used only when postal access to your facility is required. The postal lock mechanism must be obtained by application to your local post office.

Installation: Open the front panel of the Entry Phone and remove the hole plug.

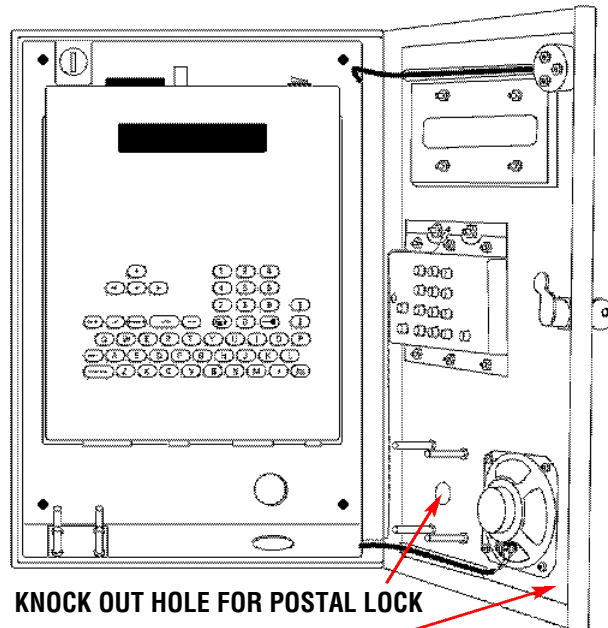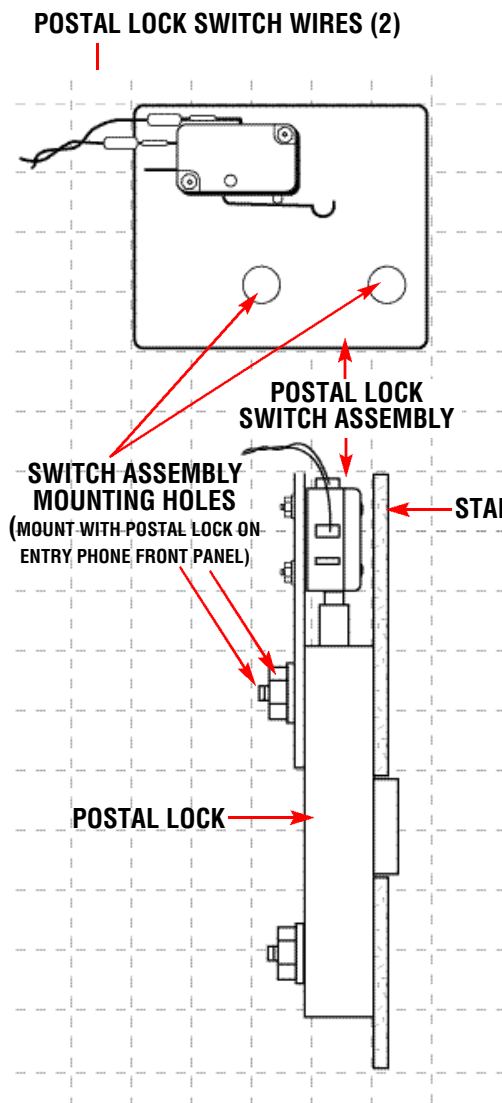

(Retain nuts and washers) Install the postal lock with the sliding bolt oriented away from the speaker.


Install the enclosed plate end switch assembly over the sliding bolt so that when the bolt is extended it will activate the switch as shown in the diagram.

Fasten by using the enclosed flat washer, lock washer, and nut on each of the four studs. Adjust the plate and switch location as the nuts are tightened to ensure switch activation when the bolt is extended.

Connect the two wires from the postal lock switch in parallel with either the two blue wires (door relay) or the two yellow wires (gate relay) at the 15 pin input/output connector. Note that polarity or color coding is not required. As example: If you wish to activate the door using the postal lock switch, connect wire 1 from the switch to one of the blue wires and connect wire 2 from the switch to the other blue wire.

Test operation by activating the lock. Ensure that full extension of the sliding bolt will not bend or break the switch.


INPUT/OUTPUT PORT CONNECTOR

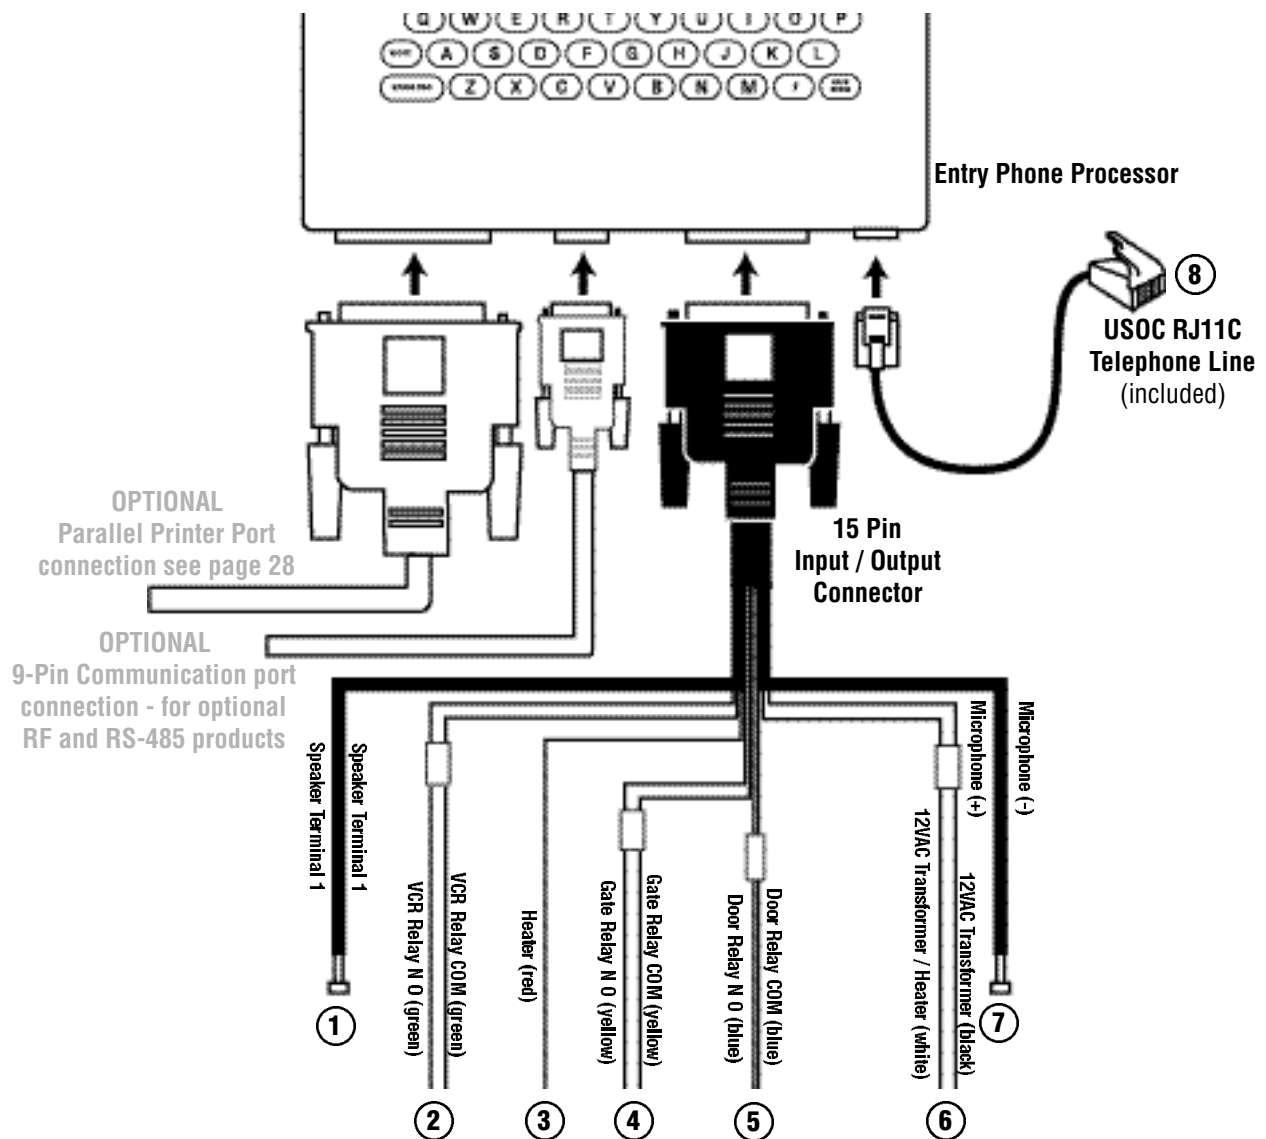

- ① **SPEAKER TERMINAL:** Pre-installed speaker output.
- ② **VCR RELAY:** For use with Time Lapse VCR. Each time access is granted, the VCR Relay is activated for 5 seconds, allowing recording of all access to facility.
- ③ **HEATER:** For use with the white wire to allow optional heater kit to be connected. Relay goes on at 0°f and off at 20°f.
- ④ **GATE RELAY:** for use with gate operator to control access through main vehicular gate.
- ⑤ **DOOR RELAY:** For allowing access through pedestrian gate or door.
- ⑥ **12 VAC:** Power supply to the Entry Phone.
- ⑦ **MICROPHONE:** Pre-installed microphone input.
- ⑧ **TELEPHONE LINE:** Standard USOC RJ11C phone line (included) to be connected to standard phone jack.

NOTE: Telephone line used for phone entry system must be a dedicated line.

COMMUNICATION PORT CONNECTORS

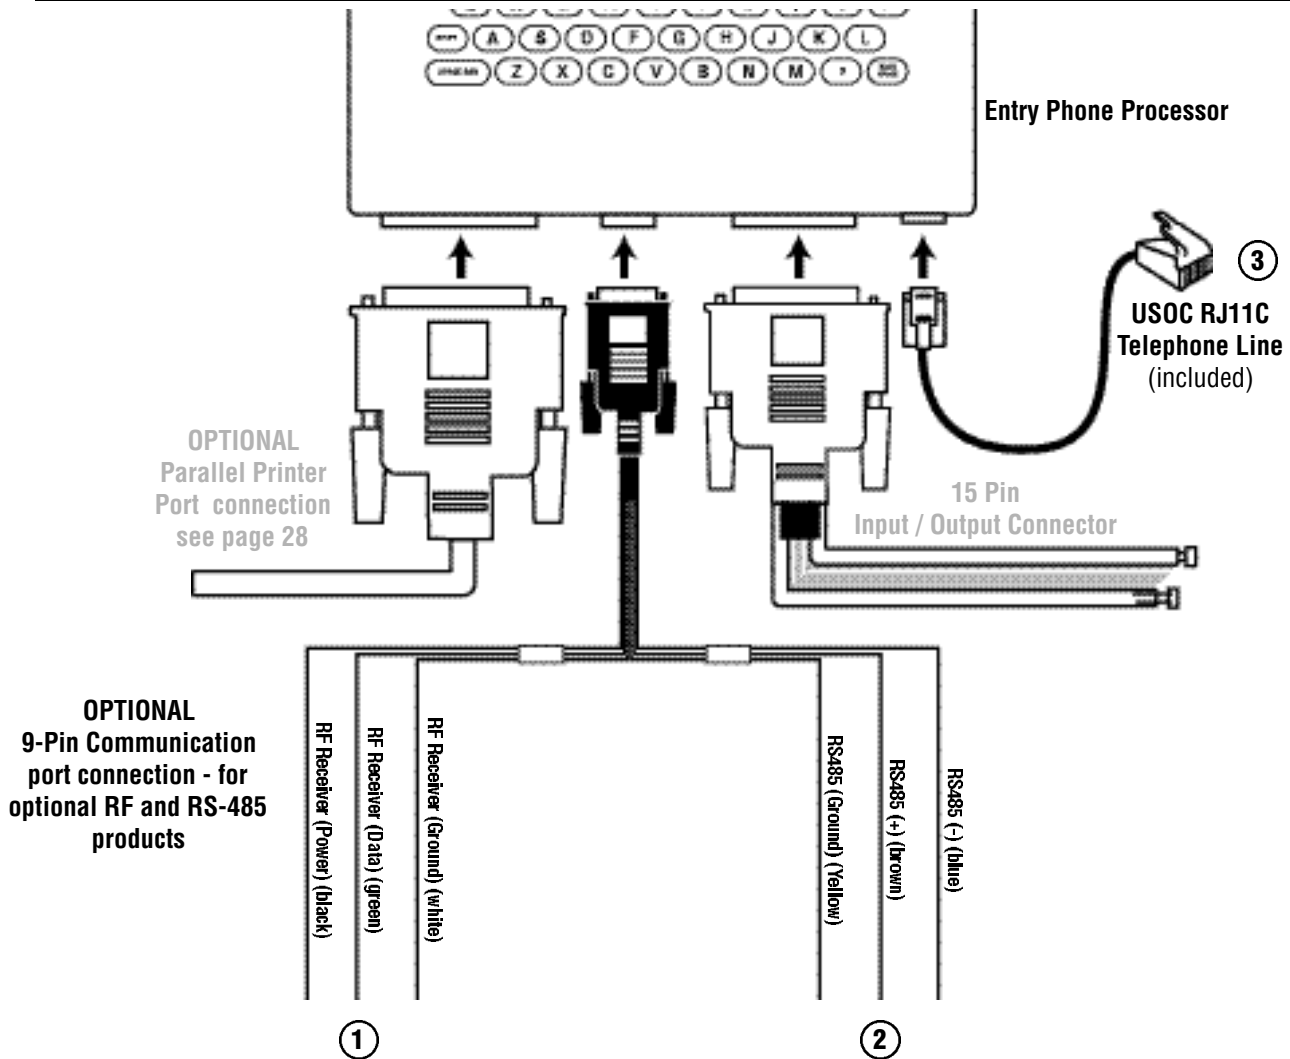


① **RF RECEIVER:** For use with local RF receiver. (See Receiver Connection Manual.)

② **RS485:** Connect to corresponding RS485 terminals (-, +, GND) of remote security devices.

③ **TELEPHONE LINE:** Standard USOC RJ11C phone line (included) to be connected to standard phone jack.

RS-485 CONNECTION EXAMPLE

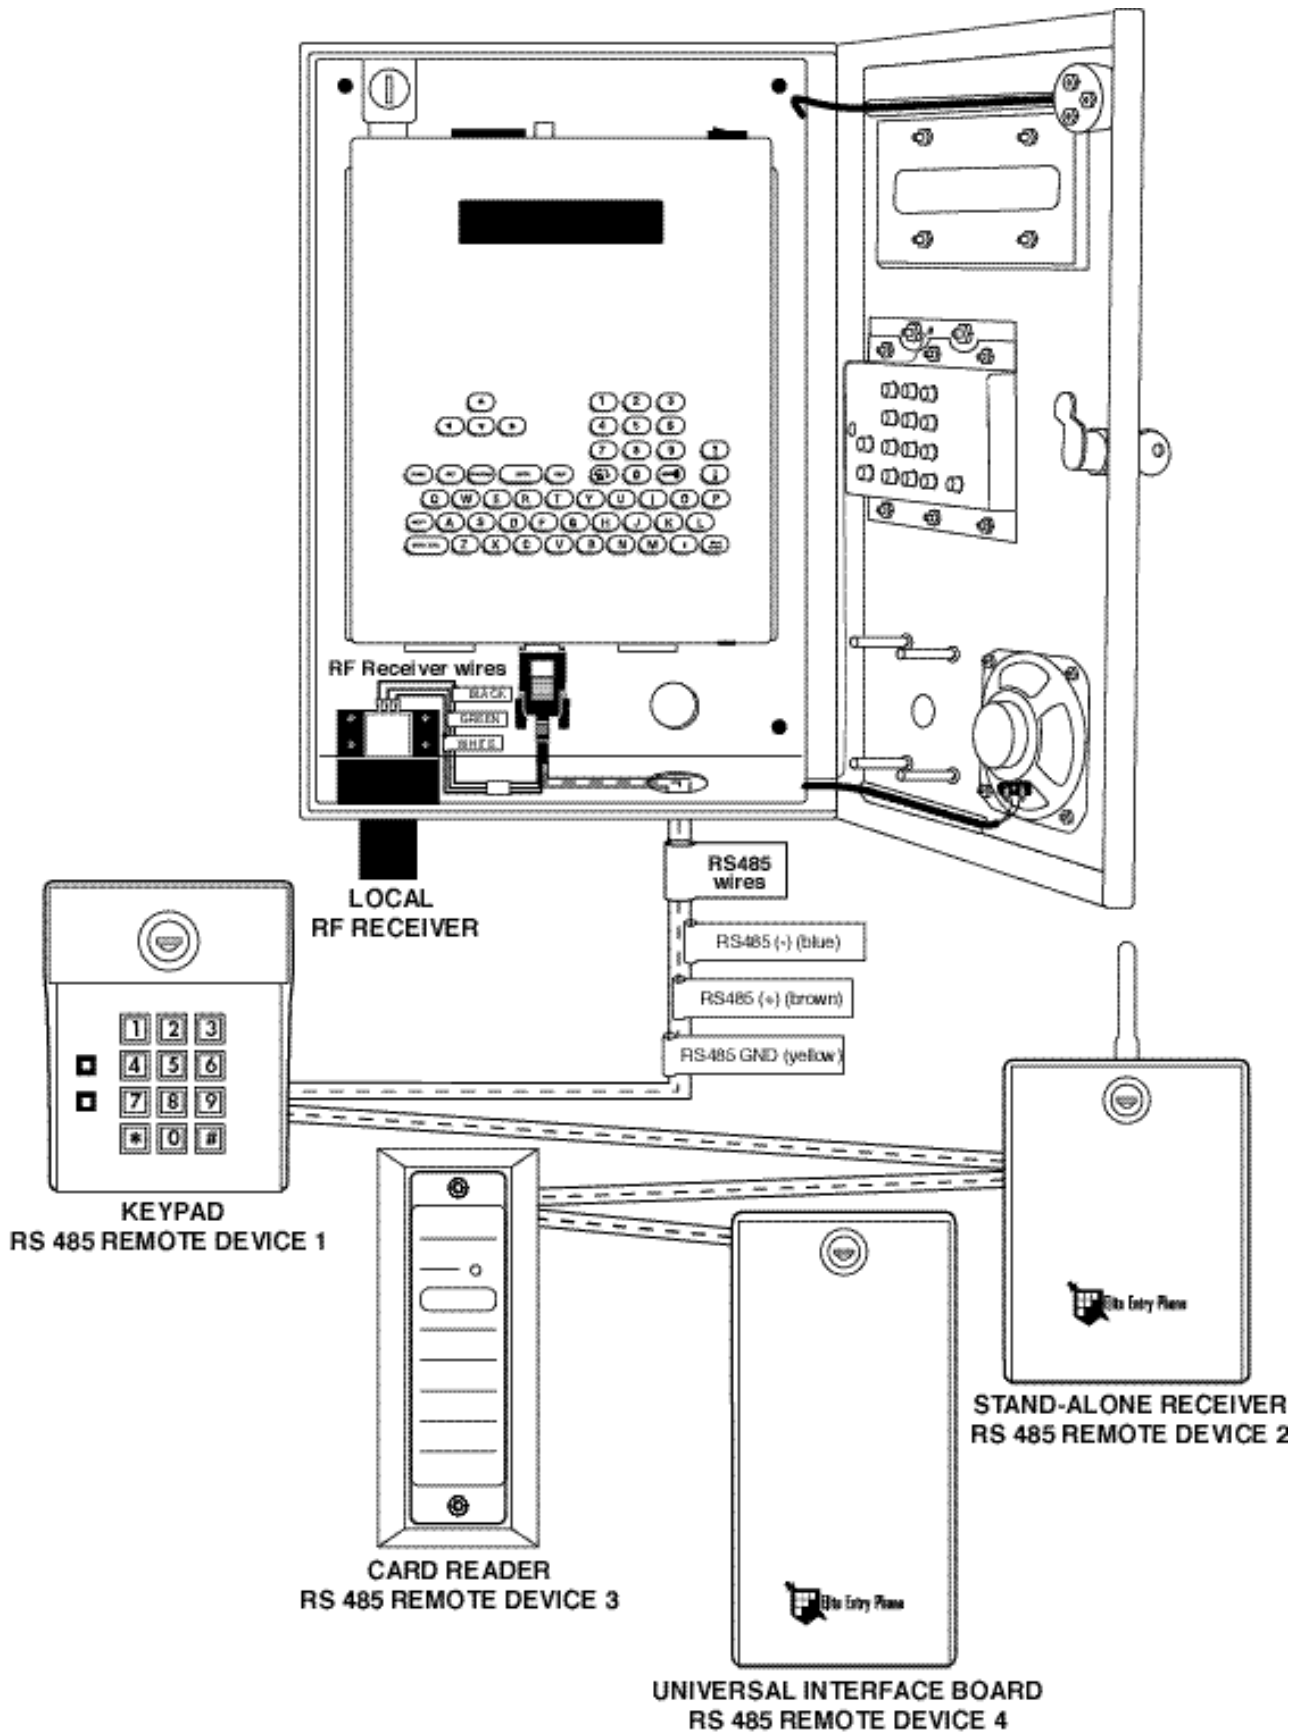


NOTE: To support RS485 devices you must install the Communicator Card.


RS-485 CONNECTION CONFIGURATIONS

RS-485 buses will work with all of these configurations, but you should avoid (b), (d), and (f). Configurations (a), (c), and (e) offer superior transmission-line performance. * Last remote device (set "Terminator Switch" ON).


(a)
YES

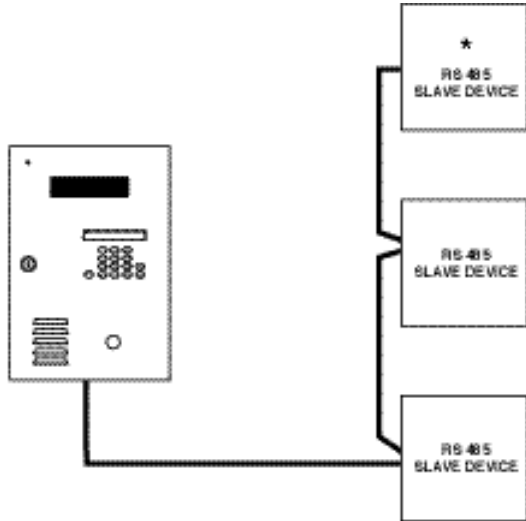


(b)
NO

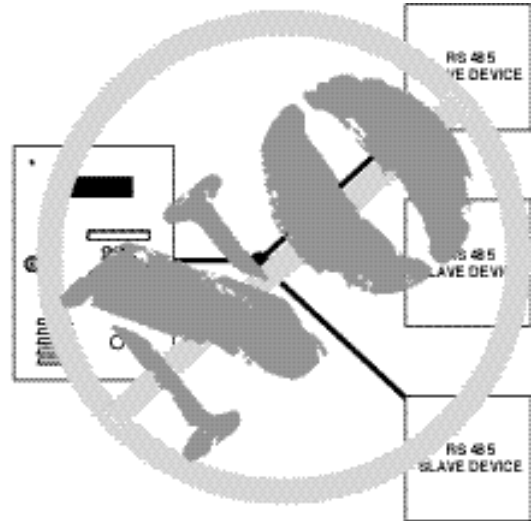


(c)
YES

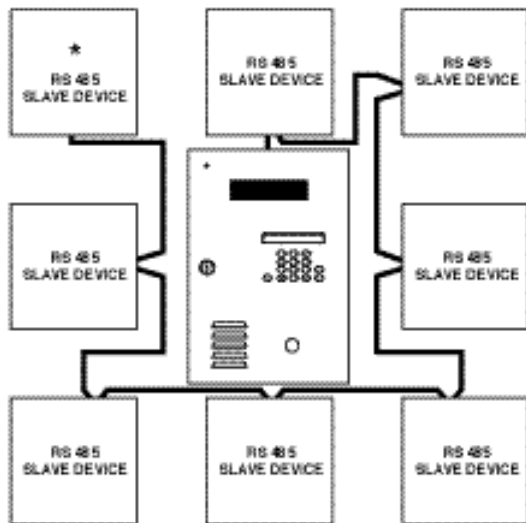


(d)
NO

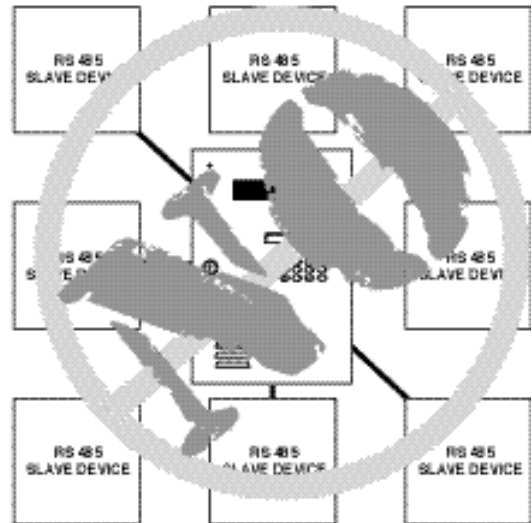

(e)
YES

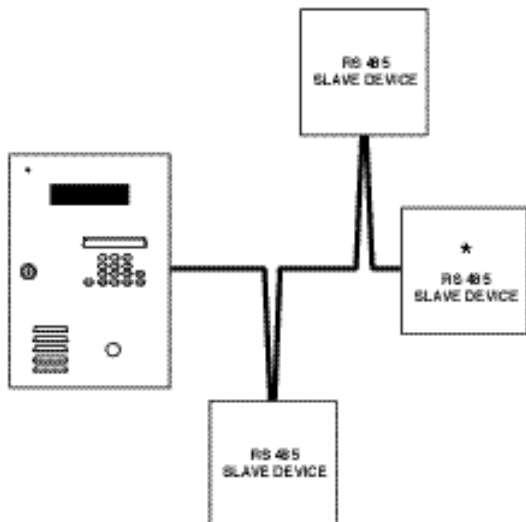





(f)
NO

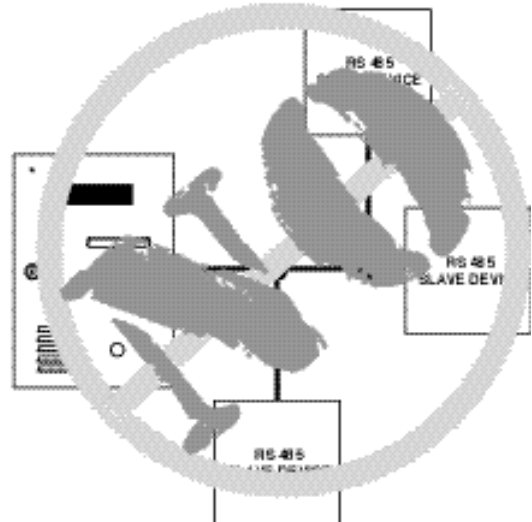

MEMORY CARD INSTALLATION


A. Turn power on and insert Memory Card into Main Memory Card Slot (Main Memory Card in back slot, Backup Memory Card in front slot.) (fig a.) Push it all the way in until card “snaps” into place and the release button pops up. The screen should display the “Welcome Screen” (fig b.)

B. If the screen continues to display the “Insert Memory Card” screen (fig c.) then Eject memory card by pressing the corresponding release button down and reinsert Memory Card into main slot (fig d.). Otherwise continue with programming.

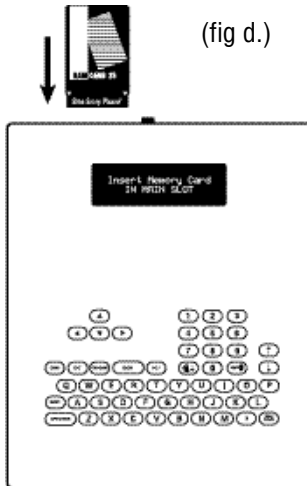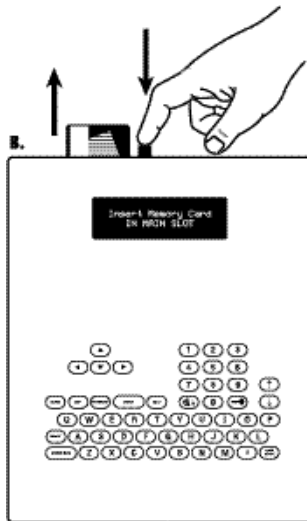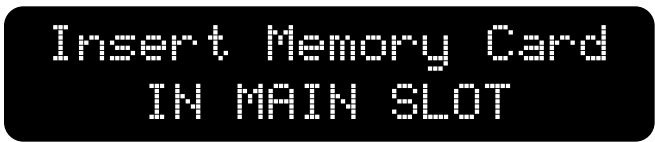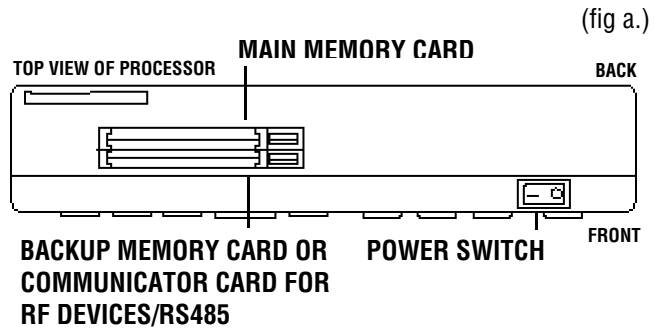

VIEWING THE SOFTWARE VERSION

A. To view the memory capacity of the system or to view the software version currently running on the system in operation an information screen is accessible on all Dial Code systems for easy reference. Turn power off and insert Memory Card in Main Memory Slot. Turn power on and the information screen should display as seen in (fig e.)

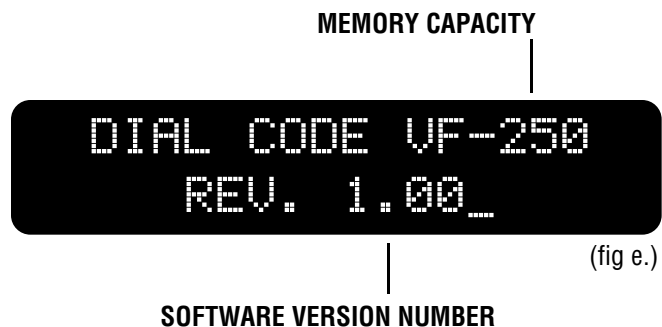


CONNECTING KEYPAD LIGHT WIRES

IF YOU ARE USING THE PHONE'S OWN TRANSFORMER FOR POWER:



- STEP 1 Unplug the transformer.
- STEP 2 Connect the black and white wire on the light in parallel with the black and white wires on the phone.
- STEP 3 Stow the wires in the bottom of the box neatly.
- STEP 4 Plug in the transformer. Test the phone for normal function. All five lights in the hood should be lit.

IF YOU ARE USING A SECOND TRANSFORMER TO POWER THE LIGHT: (Time clock or existing security lights)

- STEP 1 Run your wires to a place to plug in the 12V transformer.
- STEP 2 Wire the black & white wires to the 12V (AC or DC) transformer per all local codes & standards.
- STEP 3 Plug in the transformer. Test the phone for normal function. All five lights in the hood should light with the power on.

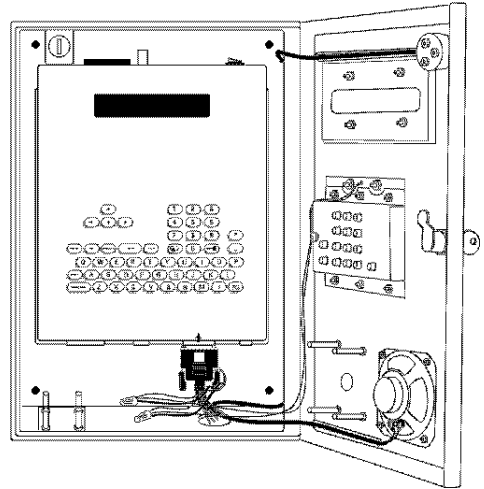

WARNINGS AND PRECAUTIONS

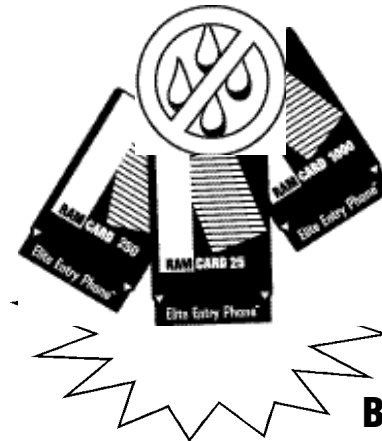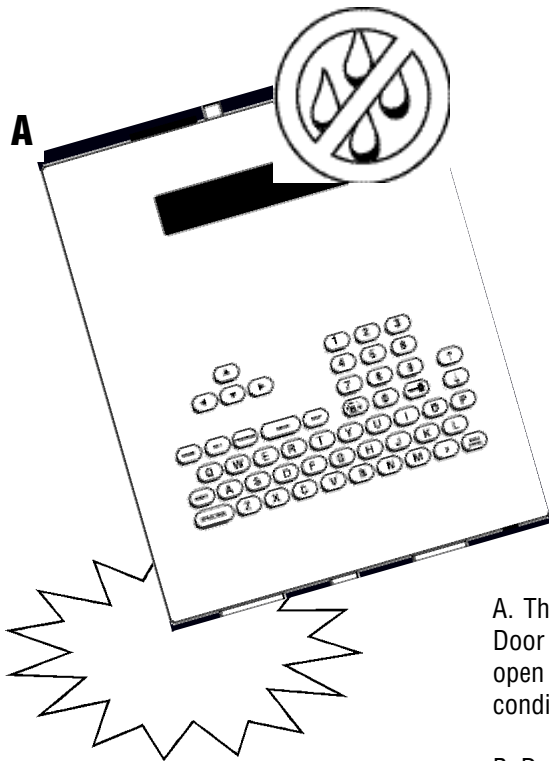

A. The Entry Phone is only water resistant when the Stainless Steel Door is closed and locked. Do not expose the Processor Unit or the open Processor Containment Box to rain, snow, or harsh weather conditions. Do not drop the Processor or expose it to impact.


B. Do not touch the terminals. Do not bend, drop or expose to impact.

PROGRAMMING THE PROCESSOR

ENTERING THE PROGRAM MODE

When the Processor unit is turned on and the  button is pressed, the screen will display:



```
TO ENTER PROG MODE,  
Type Password >_____
```

Type in the factory present password (7777). Press  The Program Selection Screen will display:

```
SELECT PROG MODE: ↓  
(N)Names (U)Utility
```

If you enter the wrong password, the screen will prompt you to try again:

```
INVALID PASSWORD  
(R)Retry (EXIT)Quit
```

Press  to retry entering your password. Press  to quit the programming menu.

Pressing the  button will provide users with a help message.

IMPORTANT NOTE: While in the help screens, programming will be disabled.



To continue programming, press the  button to exit the help screens first.

SELECTING PROGRAM MODE

LIST OF PROGRAM MODES:

1	Names	N	Program or edit Tenant Names	page 19-21
2	Utility	U	Program or edit Utility Codes	page 22
3	Password*	P	Program New Password (recommended)	page 23
4	Clock/Timer	C	Program System Clock and Seven Day Timers	pages 24-26
5	Strike Time	S	Program relay output time (for 2 relays)	page 27
6	Talk Time	T	Program length of Talk Time	page 27
7	Report Printing	R	Program setup of different report printing	page 28
8	Greeting	G	Program custom Welcome Screen Message	page 29
9	Volume	V	Program Volume level	page 29
10	Backup	B	Backup of memory card	page 30

*We recommend you customize your password to avoid unauthorized programming (see pg 23)
To select a Program Mode, press the corresponding letter from one of the ten options.

Use the   keys to scroll through the ten different Program Modes.

```
SELECT PROG MODE: ↓
(N)Names (U)Utility
```

```
SELECT PROG MODE: ↓↑
(T)Talk Time
```

```
SELECT PROG MODE: ↓↑
(P>Password
```

```
SELECT PROG MODE: ↓↑
(R)Report Printing
```

```
SELECT PROG MODE: ↓↑
(C)Clock/Timer
```

```
SELECT PROG MODE: ↓↑
(G)Greeting
```

```
SELECT PROG MODE: ↓↑
(S)Strike Time
```

```
SELECT PROG MODE: ↑
(U)Volume (B)Backup
```

Pressing the  button will provide users with a help message.

IMPORTANT NOTE: While in the help screens, programming will be disabled.

To continue programming, press the  button to exit the help screens first.

TENANT INFORMATION

STEP 1 In the Program Selection Screen (fig a.), Press the **N** key. The screen will display (fig b.):



STEP 2 You now have three options:

To program by name, press the **N** key and the first empty code will display.

OR


To program by code, enter a three digit code* and press the **ENTER** key.

OR

To view or edit an existing name or code, use the **↑** **↓** keys to scroll through Directory.

* The unit will only accept codes within it's range - depending on memory capacity.

STEP 3 Type in the desired Tenant name, LAST name first, followed by the first name (fig c.). If the code you have selected is already used, there will be a name already. You can edit the name by simply typing over it. Press the **ENTER** key to complete the entry. You may also use the **←** **→** **↑** **↓** keys to move the cursor within a code.

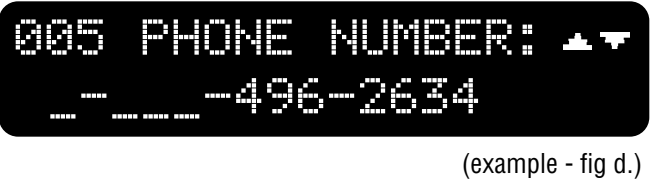

STEP 4 Type in the desired Tenant phone number (fig d.). If you need to enter an area code refer to the next page. Press the **ENTER** key to complete the entry. The KEY CODE screen will be displayed.

(example - fig e.)

STEP 5 An individual six digit Tenant Key code may be assigned to each tenant. Tenants can use their Key Code to access the premises.





Assignment of Tenant Key Codes is optional. The first three digits of the Key Code is the assigned Directory Code. Assign the last three digits (numeric characters only) to create an individual Key Code. If using the RF Card, proceed to Step 6 (fig e). Press the **ENTER** key.

TRANSMITTER/CARD PROGRAMMING

STEP 6 To complete entry, press the  key to return to the program selection screen.

To program RF devices (i.e. transmitters/cards etc.) continue on to Step 7.

NOTE: To enable the transmitter/card programming feature, you must insert the communicator card in the “backup” slot before you turn on unit. (refer to memory card installation section of manual)


STEP 7 Use   keys to view and program up to 10 transmitter or card codes associated to the directory code.



To program a transmitter or card code, you may enter the code manually using the keypad or you may scan the transmitter/card code.



STEP 8 To scan a card code, press the “S” key and activate the card as shown in fig a.


To scan a transmitter code, press the “S” key and activate the transmitter as shown in fig b.

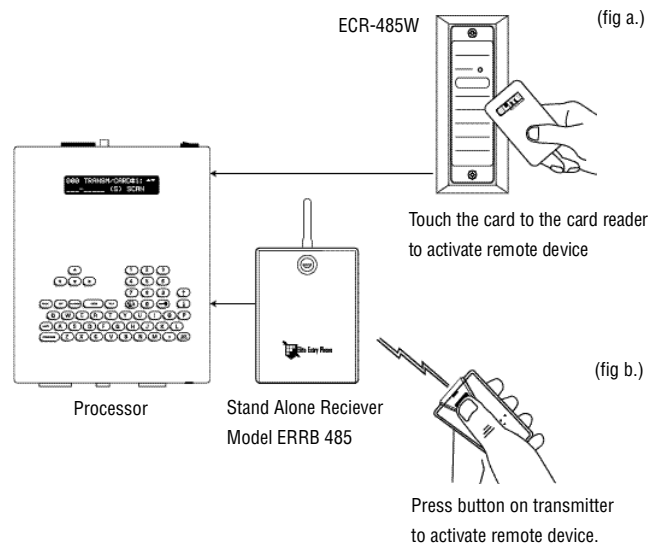

STEP 9 Repeat steps 7 and 8 for up to ten devices per directory code. After the last device has been programmed, press  or  key to return to the program selection screen.




NOTE: The time zones and restrictions associated with transmitter/card codes can only be programmed remotely using the EMS modem software.

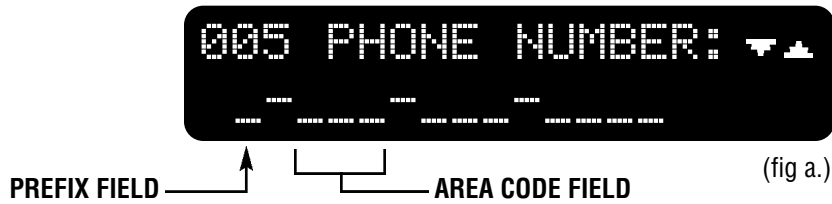AREA CODES



In special applications, it is necessary to enter area codes for Tenant Phone Numbers. Area codes are entered from the Phone Number screen (fig a.).



Use the  key to enter the area code and prefix field (fig b.). The Prefix defaults to “1” for normal 11-digit dialing. Where necessary, you can change the prefix to any number. To choose 8, 9, or 10-digit dialing, when no prefix is needed, press  while in the prefix field. Then type the required number of digits in the area code field followed by the phone number. Press the  key to continue with the entry as described on the Page 19.

To erase “Tenant” information, press the  key. Press the  key for assistance.

IMPORTANT NOTE: While in the help screens, programming will be disabled.

To continue programming, press the  button to exit the help screens first.

UTILITY CODES

A 4-digit Utility Code (numeric characters only) may be assigned to “Utility Companies” such as delivery, telephone, construction companies, water, power, etc. These utilities can use their individual code to access the premises within the time zone that you program. Each system, no matter what the memory capacity, is equipped with 60 available Utility Codes and time zones.

STEP **1** In the Program Selection Screen (fig a.), Press the **U** key. The screen will display (fig b.):

```
SELECT PROG MODE: ↓  
(N)Names (U)Utility
```

(fig a.)

STEP **2** You now have two options:

```
PROG UTILITY CODE> N  
View/Edit Codes >↓↑
```

(fig b.)

To program a new Utility Code, press the **N** key and type in a 4 digit code. If the code entered is used, type in another.

OR

Use the **↑** **↓** keys to view or edit existing Codes. The last screen will display memory spaces available. Select a code that you wish to edit.

STEP **3** Press the **↓** key or the **ENTER** key to enter code. Type the name of the utility in the screen that follows and press the **↓** key or **ENTER** (fig c.).

```
UTILITY CODE:4762  
NAME:FedEx
```

(example - fig c.)

STEP **4** Enter the desired time zone in the screen that follows (fig d.) Use the **←** **→** **↑** **↓** keys to move the cursor. To view the previous screen, use the **▲** key. Press the **ENTER** key to complete your transaction.

```
4762 TimeZone  
09:00AM To 05:00PM
```

(example - fig d.)

To erase “Utility” information, press the **ERASE** key. Press the **HELP** key for assistance.

IMPORTANT NOTE: While in the help screens, programming will be disabled.

To continue programming, press the **EXIT** button to exit the help screens first.

PASSWORD

The factory present password is 7777. We suggest that you customize it.

In the Program Selection Screen (fig a.), Press the



key.

A black rectangular screen with white text. The text reads "SELECT PROG MODE:" on the first line, "(P)Password" on the second line, and a cursor icon (a vertical line with a downward arrow above and an upward arrow below) on the third line.

(fig a.)

To customize a password, type in a four character password (it may be alphanumeric characters). Press the key to enter the new password. It will be displayed by asterisk (*) for security (fig b.) (To leave the password unchanged, press the key.)

A black rectangular screen with white text. The text reads "NEW PASSWORD:" on the first line and "****" on the second line.

(fig b.)

A confirmation screen will appear (fig c.). Type in the same password and press the key. If you enter a different password, the password will not be confirmed and you will have to repeat the transaction.

A black rectangular screen with white text. The text reads "RE-ENTER PASSWORD:" on the first line and "****" on the second line.

(fig c.)

Always remember your password! This password is required to enter the Program Mode. If you lose your password, you will need to contact the manufacturer to reissue a new password.

Pressing the button will provide users with a help message.

IMPORTANT NOTE: While in the help screens, programming will be disabled. To continue programming, press the button to exit the help screens first.

CLOCK/TIMER

The Clock/Timer allows you to set the date and time, and to program gates and doors to be opened or closed whenever specified. This clock is equipped with 100 year calender, auto leap year compensation and daylight savings.

In the Program Selection Screen (fig a.), Press the **C** key.

```
SELECT PROG MODE: ↓↑
(C)Clock/Timer
```

(fig a.)

Use the **↑** **↓** keys to scroll between the three different menu choices (fig b.). Select the number of your choice or press the **ENTER** key while on the selection of your choice.

```
PROG CLOCK/TIMER ↓
(1)Date & Time
```

```
PROG CLOCK/TIMER ↓↑
(2)Gate Timer
```

```
PROG CLOCK/TIMER ↑
(3)Door Timer
```

(fig b.)

CAUTION: Make sure to set the Date and Time before programming the clock timers for the door and gate.

1. DATE AND TIME

Use the **1** key to set the Date and time, use the **←** **→** **↑** **↓** keys to move the cursor. Press the **ENTER** key to enter your input.(fig c.)

```
DATE>02-11-96
Time>07:31am p=pm
```

(fig c.)

Use the **↑** **↓** keys to select the current day of the week. Press the **ENTER** key to enter your input. (fig d.)

```
Today Is THURSDAY
Use ↓↑ To Select Day
```

(fig d.)

Select daylight savings by pressing **Y** for yes or **N** for no. The **ENTER** key will complete the date and time entry. (fig e.)


```
Daylight Savings>y
(Y)Yes (N)No
```

(fig e.)


CLOCK/TIMER CONTINUED

2./3. DOOR AND GATE TIMERS

Press **2** to program Gate Timers Menu. Press **3** to program the Door Timers Menu.

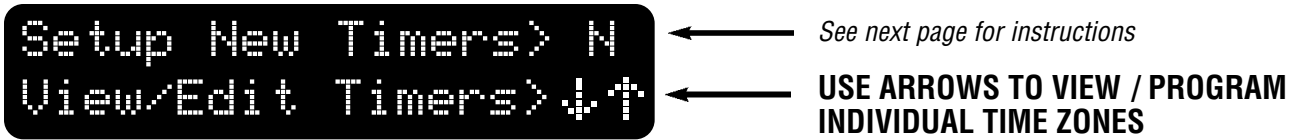

Use **↑** **↓** to view and program timer(s) for Sunday through Saturday. Move the cursor **←** **→** **↶** **↷** to time and type in the setting. Two timers can be set for each day of the week following the procedure below. (fig a.)

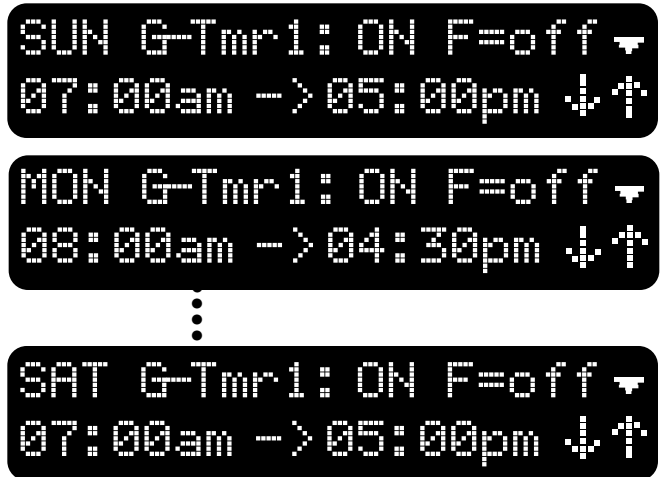

(fig a.)

Program timers 1 & 2 for any day of the week (fig b. & c.)

Press **N** to turn timer 1 ON or press **F** to turn timer 1 OFF. Press the **ENTER** key. Type the desired timer 1 setting. For **am** type **A** For **pm** type **P** Press **ENTER** to program the timer 2.



(fig b.)



(fig c.)

To program the second timer, repeat the above procedure. Press the **ENTER** key when complete.

To exit "Timers" screen, press the **EXIT** key. Press the **HELP** key for assistance.

IMPORTANT NOTE: While in the help screens, programming will be disabled.

To continue programming, press the **EXIT** button to exit the help screens first.

CLOCK/TIMER CONTINUED

2./ 3. DOOR AND GATE TIMERS, cont'

Press **2** to program Gate Timer Menu Press **3** to program the Door Timers Menu

```
Setup New Timers> N
View/Edit Timers> ↓↑
```

← **PRESS (N) TO PROGRAM
SETS OF TIME ZONES**

← *See previous page for instructions*

Program timers 1 & 2 for any day of the week (fig d.)

Press **N** to turn timer 1 ON or press **F** to turn timer 1 OFF. Press the **ENTER** key. Type the desired timer 1 setting. For **am** type **A** For **pm** type **P** Press **ENTER** to program the timer 2.

```
GATE Tmr1: ON F=off ▼
__ : __am -> __ : __pm
```

(fig d.)

To program the second timer, repeat the above procedure. Press the **ENTER** key when complete.

```
GATE Tmr2: ON F=off ▼
__ : __am -> __ : __pm
```

Timer 1 & 2 settings can be copied to any day(s) of the week. Select the day(s) of the week to be copied. Press **Y** to select day or press **N** to not select day of week. Press **ENTER** when complete. (fig e.)

```
COPY Timers1,2 To ▼▲
Workdays(y) Sun(n)
```

```
COPY Timers1,2 To ▼▲
Mon(n) Tue(n) Wed(n)
```

```
COPY Timers1,2 To ▲
Thr(n) Fri(n) Sat(n)
```

(fig e.)

To exit "Timers" screen, press the **EXIT** key. Press the **HELP** key for assistance.

IMPORTANT NOTE: While in the help screens, programming will be disabled.

To continue programming, press the **EXIT** button to exit the help screens first.

STRIKE TIME

Strike Time sets the amount of time your gate or door relay will be held open.

In the Program Selection Screen (fig a.), Press the

S key.

```
SELECT PROG MODE: ↓ ↑
(S)Strike Time
```

(fig a.)

The strike time can be set for both gates and doors

(fig b.)

```
Door Strike Time > D
Gate Strike Time > G
```

(fig b.)

Press the **D** key to set the Door Strike Time. Type in a time from 1 to 99 seconds (fig c.). Press the **ENTER** key to enter your selection.

```
DOOR STRIKE TIME: ▼
[01-99] 10 Seconds
```

(fig c.)

Press the **G** key to set the Gate Strike Time. Type in a time from 1 to 12 seconds (fig d.). Press the **ENTER** key to enter your selection.

```
GATE STRIKE TIME: ▼
[01-12] 05 Seconds
```

(fig d.)

```
DOOR NAME/LOCATION ▲
South Entry Door
```

(fig e.)

```
GATE NAME/LOCATION ▲
North Side Gate
```

(fig f.)

For either the Gate or Door Strike Time, you may now type in a name and location (up to 13 characters) to which you want the programmed strike time applied. (fig e.) and (fig f.) Press the **ENTER** key to complete the transaction.

TALK TIME

You can set the amount of time to talk on the Entry Phone at 20, 40, or 80 seconds.

```
SELECT PROG MODE: ↓ ↑
(T)Talk Time
```


(fig g.)

```
TALKTIME IS 20 SEC
(B)40 Sec (C)80 Sec
```


(fig h.)

In the Program Selection Screen (fig g.), Press the **T** key. Choose the desired Talk Time, press **A** for 20 seconds, **B** for 40 seconds, or **C** for 80 seconds (fig h.). Press the **ENTER** key to confirm your entry.

REPORT PRINTING

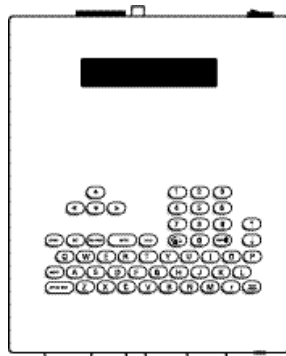

If your Processor is connected to a printer using the Parallel Printer Port, you will be able to print selected tables.

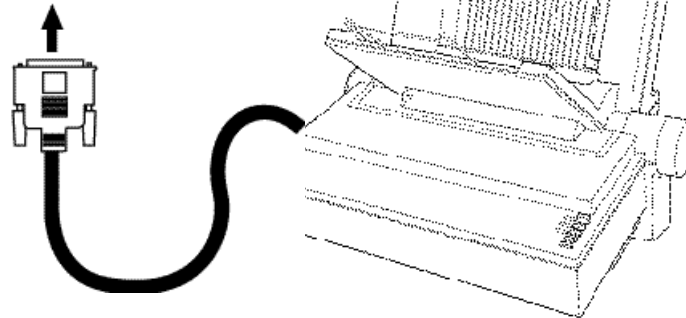

In the Program Selection Screen (fig a.), Press the **R** key.



(fig a.)



(fig b.)



(fig c.)



(fig d.)



(fig e.)


FOUR DIFFERENT PRINTING OPTIONS

Scroll through the printing options using the **↑** **↓** keys. Press the corresponding letter or the **ENTER** key to print. There are four options to print; all tenants names in order (fig b.), All tenants codes in order (fig c.), Utility Keycodes (fig d.), or 7-Day Timer settings (fig e.).

NOTE: Printer must be setup to accept standard ASCII format input. May not work on all printers, to find out if your printer will accept ASCII format, check the owners manual that came with your printer or call your printer's manufacturer.

GREETING


Use the Greeting Screen to customize the Welcome message.

In the Program Selection Screen (fig a.), Press the  key.



```
SELECT PROG MODE: ↓↑
(G)Greeting
```

(fig a.)

Type the name of the facility and press the  key to complete your entry. The system will automatically center your entry on the Welcome screen.(fig b.)




```
FACILITY NAME:
Woodbridge Meadows
```

(fig b.)

VOLUME ADJUST




Use the Speaker Volume Screen to adjust both voice message and speakerphone volume levels.

In the Program Selection Screen (fig c.), Press the  key.



```
SELECT PROG MODE: ↑
(U)Volume (B)Backup
```

(fig c.)

Use the   keys to adjust the volume to the desired level (fig d.). Press the  key to complete the entry.



```
SPEAKER VOLUME> ↓↑
- ██████████ ----- +
```



(fig d.)

Pressing the  button will provide users with a help message.

IMPORTANT NOTE: While in the help screens, programming will be disabled.

To continue programming, press the  button to exit the help screens first.

BACKUP MEMORY

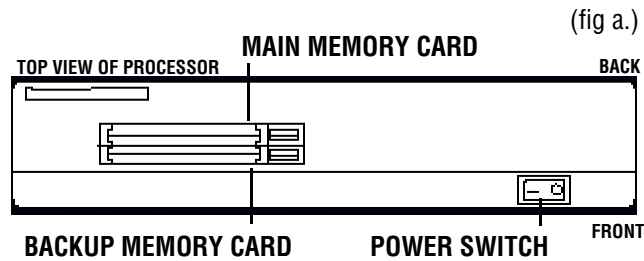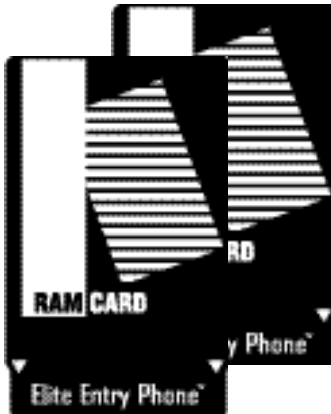

NOTE: You must have an extra memory card (sold separately) installed in the Backup Slot (fig a.) of the Processor in order to perform the backup process.

In the Program Selection Screen (fig b.), Press the **(B)** key.

```
SELECT PROG MODE: ↑
(U)Volume (B)Backup
```

(fig b.)

Insert additional memory card in the Backup Slot.

NOTE: Back-up Memory card must be the same size or greater than the Main Memory card being backed up.

```
MAIN Card Updated On
05-15-96 03:50am ↓
```

(fig c.)

The screens will display when the cards were last updated. (fig c.) and (fig d.)

Use the **(↑)** **(↓)** keys to scroll through the information.

```
BACKUP Card Updated
02-11-96 04:20am ↓↑
```

(fig d.)

Press the **(ENTER)** key to Backup.
Press the **(EXIT)** key to exit the backup process (fig e.).

```
(ENTER) To Backup
(EXIT) To Quit
```

(fig e.)

Pressing the **(HELP)** button will provide users with a help message.

IMPORTANT NOTE: While in the help screens, programming will be disabled.
To continue programming, press the **(EXIT)** button to exit the help screens first.

ERROR MESSAGES

OUT OF RANGE CODES: If the processor detects one or more 3-digit codes present on the memory card inserted that cannot be accessed, an error message is displayed. (fig a.) Codes that cannot be accessed by the limitation of the system being used cannot be edited.



Codes Detected out
of Range, See Manual

(fig a.)

LOW BATTERY If the battery backup is reaching its minimal charge level, a battery icon with a “B” next to it will display in the top right corner of the display. (fig b.) An alert beep will accompany this icon. The batteries must be charged to continue.*



Welcome To  B
Elite Entry Phone

(fig b.)

If the battery backup level reaches its minimal charge, an error message will display (fig c.) and the system will become non-functional until the battery backup is charged by using the plug in transformer.*



Battery Is Low
It Must Be Recharged

(fig c.)

LOW BATTERY ICONS: If a battery icon appears in the top right corner of the display and the letter next to it is an “M” or a “C”, as shown in figures d. and e., contact Manufacturer for instructions.



Welcome To  C
Elite Entry Phone

(fig d.)

949-580-1700




Welcome To  M
Elite Entry Phone

(fig e.)

***IMPORTANT NOTE:** In order to charge the battery in the Dial Code System, the processor must be plugged in to the transformer and the processor MUST BE ON. If the power is off on the processor, the battery will not be charging.

PARTS LIST & DIAGRAM

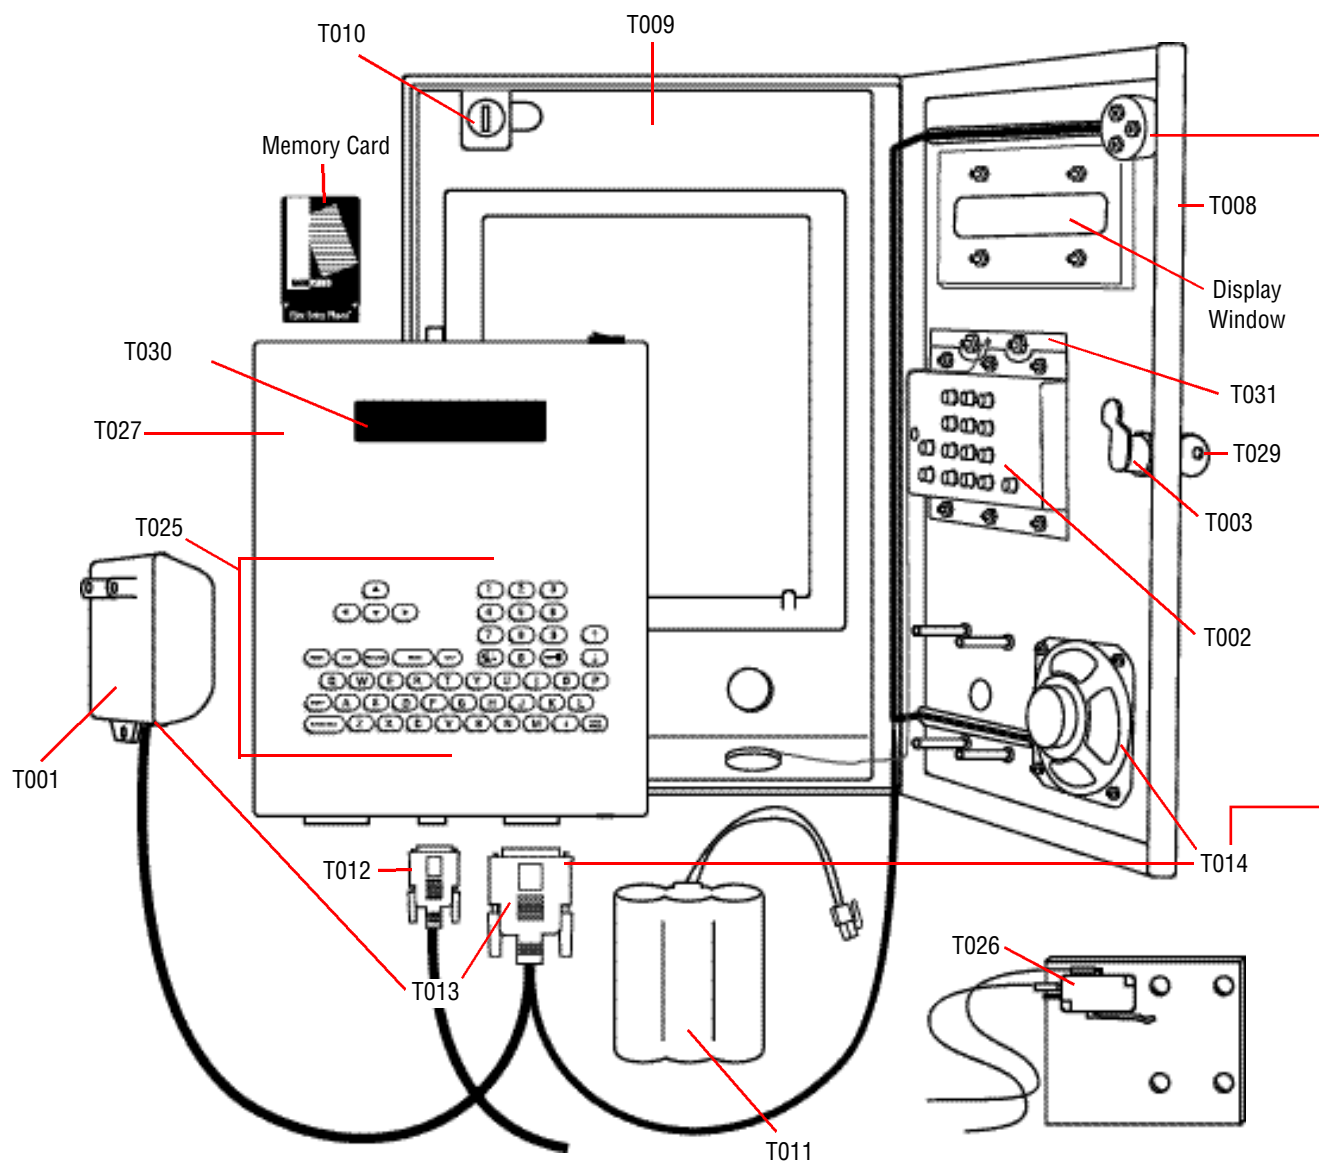

PART

T001
T002
T003
T008
T009
T010
T011
T012
T013

DESCRIPTION

Transformer
External Keypad
Key Lock
Stainless Steel Door
Processor Containment Box
Processor Key Release / Lock
Battery Backup
9 Pin Communication port Connector
Mobile Power Connection Kit (Includes:
transformer and 15 pin connector)

PART

T014

T025
T026
T027
T029
T030
T031

DESCRIPTION

External Box Connection Kit (Includes:
external mic, external speaker, & 15 pin connector)
Programming Keys
Postal Lock Assembly
LCD Processor
Key For Internal / External Lock
LCD Display
Kit For Keypad Light

All components and specifications are subject to change without notice.

APPROVALS

FCC part 68, 15 & Canadian DOC approval. Industry Canada (IC) Notice

Instruction to the User:

This equipment has been tested and found to comply with the limits for a class 13 digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- * Reorient or relocate the receiving antenna.
- * Increase the separation between the equipment and receiver.
- * Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- * Consult the dealer or an experienced radio/TV technician for help.

In order to maintain compliance with FCC regulations, shielded cables must be used with this equipment. Operation with non-approved equipment or unshielded cables is likely to result in interference to radio and TV reception. The user is cautioned that changes and modifications made to the equipment without the approval of manufacturer could void the users authority to operate this equipment.

"Notice: The Industry Canada (IC) label identifies certified equipment. This certification means that the equipment meets telecommunications network protective, operational and safety requirements as prescribed in the appropriate Terminal Equipment Technical Requirements document(s). The department does not guarantee the equipment will operate to the users satisfaction.

Before installing this equipment, users should ensure that it is permissible to be connected to the facilities of the local telecommunications company. The equipment must also be installed using a acceptable method of connection. The customer should be aware that compliance with the above conditions may not prevent degradation of service in some situations.

Repairs to certified equipment should be coordinated by a representative designated by the supplier. Any repairs or alterations made by a user to this equipment, or equipment malfunctions, may give the telephone communications company cause to request the user to disconnect the equipment.

User should ensure for their own protection, that the electrical ground connections of the power utility, telephone lines and internal metallic water pipe system, if present, are connected together. This precaution may be particularly important in rural areas."

Caution: Users should not attempt to make such connection themselves, but should contact the appropriate electric inspection authority, or an electrician, as appropriate."

"Notice: The Ringer Equivalent Number (REN) assigned to each terminal device provides an indication of the maximum number of terminals allowed to be connected to the telephone interface. The termination on a interface may consist of any combination of devices subject only to the requirement that the sum of the Ringer Equivalent Numbers of all the devices does not exceed 5."